

Fig. 1a

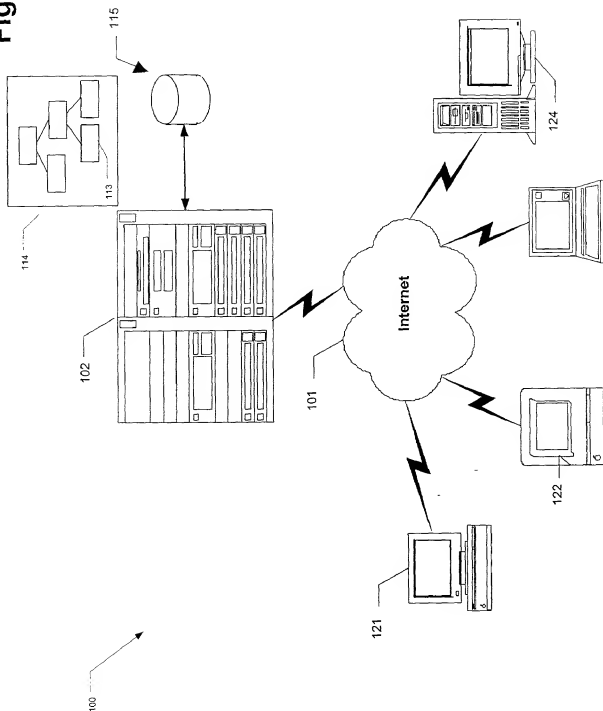
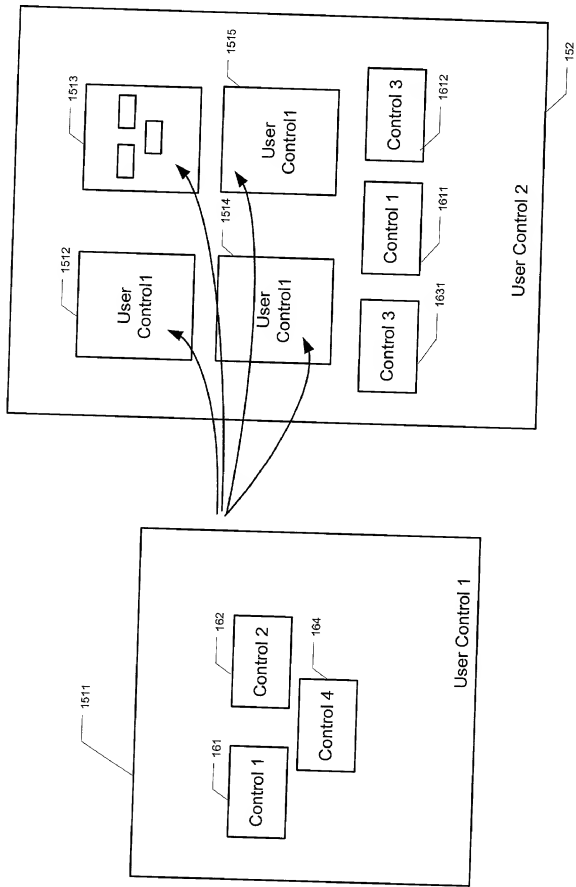


Fig. 1b



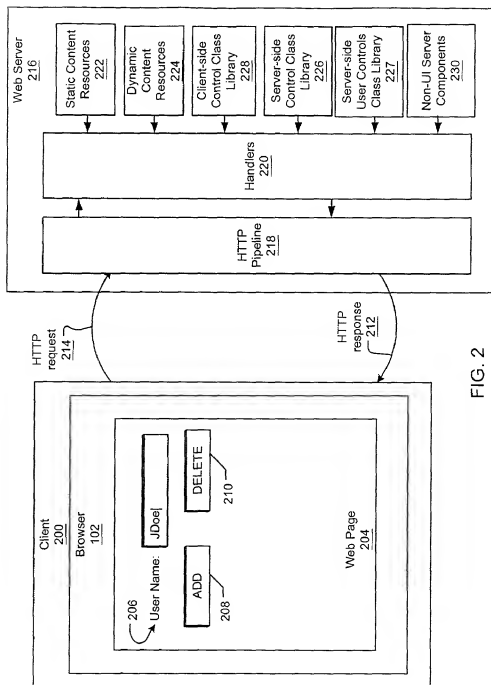


FIG. 2

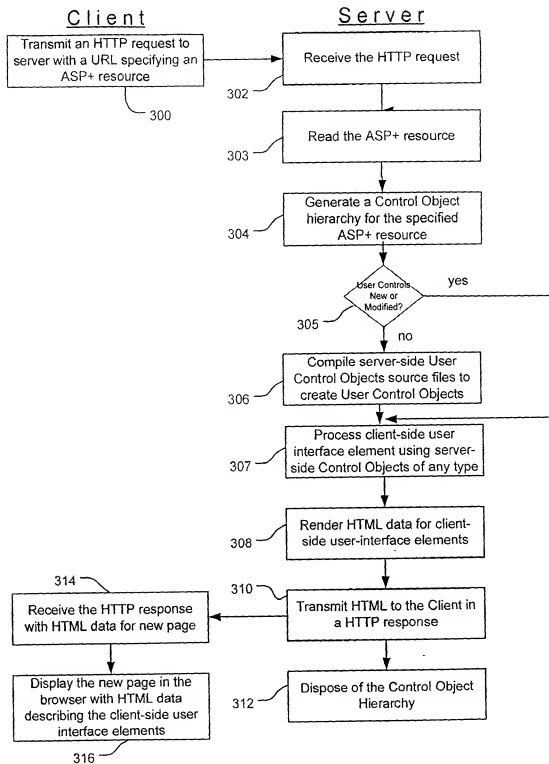


FIG. 3

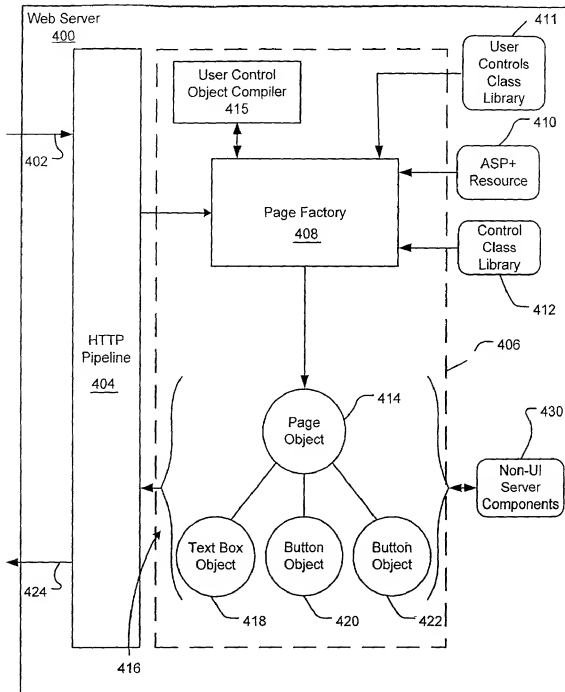


FIG. 4

```

500 Testpage.aspx
1  <%@ Page Description="A Sample Page Consuming a User Control" %>
2  <%@ Register TagPrefix="merchant" TagName="datagrid" Src="MySimpleControl.aspx" %>
3  </html>
4  <script language="VB" runat=server>
5    sub Page_Load(Sender as Object, E as EventArgs)
6      MySimpleControl.CustomerState = "CA"
7    End Sub
8  </script>
9  <body>
10   <h1> Merchant Page Title</h1>
11   <merchant:datagrid id="MySimpleControl" runat=server/>
12
13  </body>
14  </html>

510 MySimpleControl.aspx
1  <html>
2  <script language="VB" runat=server>
3    Public CustomerState = string
4    sub Page_Load(Sender as Object, E as EventArgs)
5      MyList.Data = SQL_Call("Select * from Authors = " & CustomerState)
6    end Sub
7  </script>
8  <body>
9  <h1> Merchant Page Title</h1>
10  <asp:datagrid id="MyList" runat=server/>
11  </body>
12  </html>

```

FIG. 5

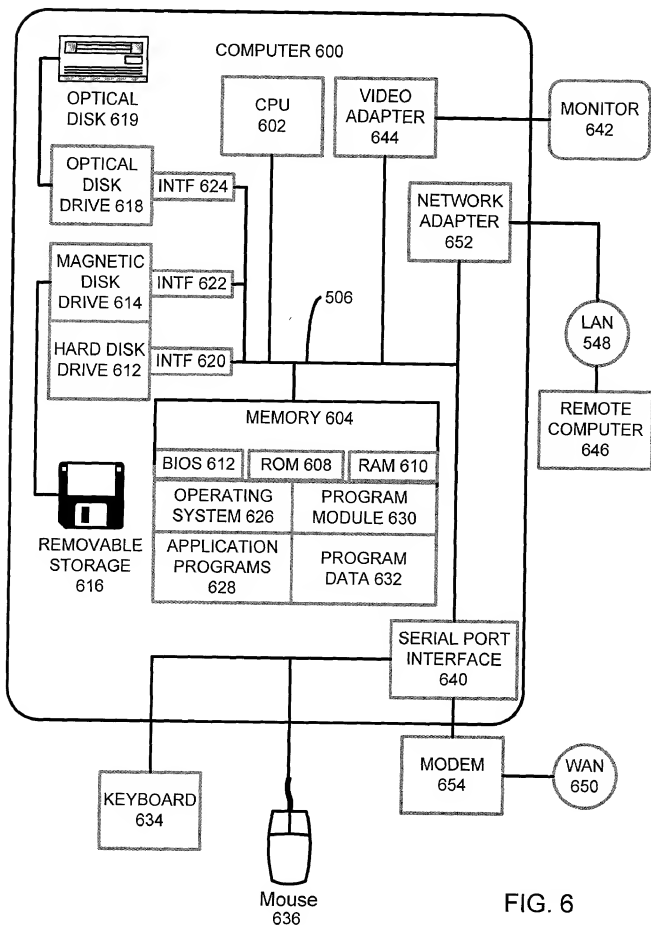


FIG. 6

FIG. 7

